

EXORAA™


Exoraa™ est la première fixation de LED «ultra compact» conçue par Exalux® pour des petits studios de télévision et des webtv.

Le concept d'Exoraa™ est basé sur le moteur de la LED AR111 Soraa™ et sur une totale personnalisation en «un instant».

Spectre lumineux complet, lumière parfaite

- > Rendu colorimétrique fidèle au travers du spectre lumineux visible complet
- > 4 000K | 9° | 18.5W | 1 040lm
- > IRC : 92 | R9 : 95


Plan technique :

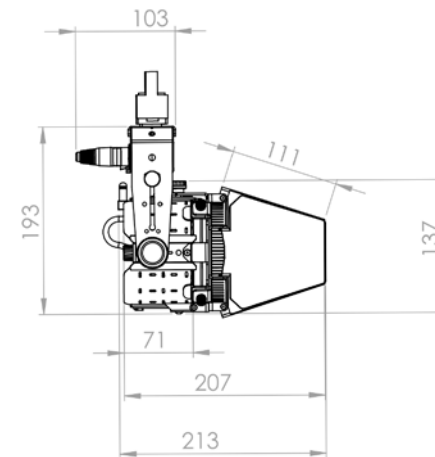

Caractéristiques et Avantages

- > Lampe Soraa AR111 interchangeable
- > Elargisseurs de vaisseaux et filtres CCT interchangeable
- > Présence d'un variateur. Intensité lumineuse entre 10% et 100%
- > Gradateur haute performance sans scintillement
- > Contrôleur DMX 512 intégré
- > Mode variation manuelle ou DMX
- > Adaptateur éclairage sur rail
- > 85-264 VAC / ~20W


Couleurs disponibles :

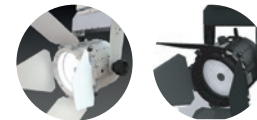


Ampoules disponibles :




TENSION
20W (EQ.75W)



AMPOULE LED
DÉMONTABLE



PERSONNALISABLE
«EN UN CLIN D'OEIL»




VOLETS
DÉMONTABLE




EXORAA



AR111




Filter correcteur de température
Filter élargisseur Ap faisceau
Nid d'abeilles



VOLETS

Accessoires optionnels :

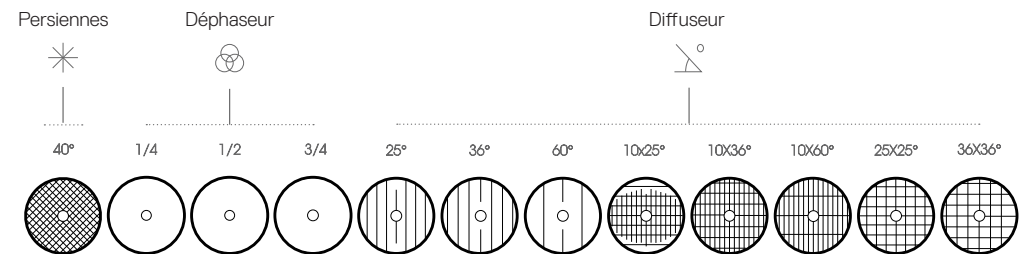

Flux lumineux
1040lm/m



Tension constante
20W



Température
4000K-RA92



Variateur
10-100%



Contrôleur
DMX512



Lentilles
Personnalisable



EXORAA™

Exoraa™ is the first “ultra compact” LED fixture designed by Exalux® with the french DOP Jean Clavé for small TV studios and webTV.


Most of lighting designers will certainly be won over by Exoraa’s cinema design.

Exoraa™ concept is based on a soraa AR111 LED engine and fully customisable “in a snap”.

Full spectrum, perfect light

- > Accurate color rendering across a full visible spectrum
- > 4 000K | 9° | 18.5W | 1 040lm
- > CRI : 92 | R9 : 95


Mechanical drawing:

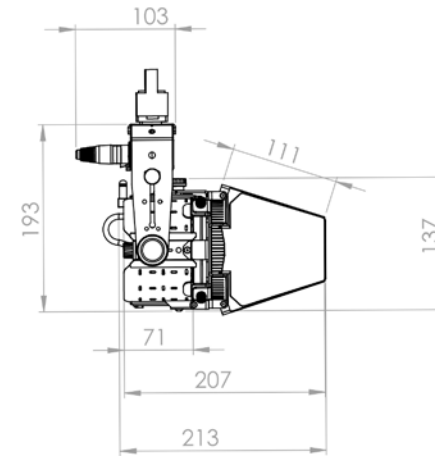

Specifications and benefits

- > Interchangeable Soraa AR111 lamp
- > Interchangeable beam spreaders and CCT shifters
- > Dimmable range: 10%-100%
- > Flicker free high performance dimmer
- > DMX 512 built-in and CRMX by LumenRadio controller
- > Manual/DMX dimmer mode
- > Lighting track adapter
- > 85-264 VAC / ~20W


Available colors:

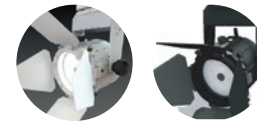


Available lighting bulb:



POWER
20W (EQ.75W)




REMOVABLE
LED BULB



CUSTOMIZABLE
«IN A SNAP»




REMOVABLE
BARNDOORS




EXORAA



AR111



cct shifters
beam spreaders
louvers



barn doors

Optional accessories:

louvers



40°



CCT shifters



1/4



1/2



3/4



Beam spreaders



25°



36°



60°



10x25°



10x36°



10x60°



25x25°



36x36°



Luminous flux
1040lm/m



Voltage
20W



Color temperature
4000K-RA92



Dimmer
10-100%



Controller
DMX512



Lens
Personalisable